



<b>General:</b>	Assembled by A&I Manufacturing, Inc. <b>Environmentally safe.</b>
<b>Operation:</b>	Bead chain through manual clutch mechanism.
<b>Clutch:</b>	Bead chain driven assisted by a stainless steel spring and spring shim. Clutch housing made from PA6 with glass fibers. Colors: Black, White
<b>Chain:</b>	Plastic, nickel plated steel, stainless steel.
<b>Idle End:</b>	Made from glass fiber reinforced PA6. Color to match clutch.
<b>Tube:</b>	1 1/4", 1 1/2", 1 3/4", 2" hollow extruded aluminum(6063-T5) tube.
<b>Brackets:</b>	1 15/16"x2 7/16", 2'x25 5/8", 2 9/16"x3 1/16", cold rolled steel ASTM A1008. Wall or ceiling mount. White, Black.
<b>Bracket Covers:</b>	White, Black plastic.
<b>Internal Hembar:</b>	1/8"x1" extruded aluminum 6063-T5 flat stock.
<b>External Hembar:</b>	1 3/6"x9/16" rectangle, 1 1/2"x3/8" rectangle extruded aluminum 6063-T5. Colors: White, Bronze, Alabaster, Anodized, Black. Available at extra cost.
<b>Fabric:</b>	B/O, 1%, 3%, 5%, 8%, 10%, Translucent openness in various colors.
<b>P-Clip Safety Tensioner:</b>	Clear Poly-carbonite. Shall comply with all safety requirements.
<b>Sizes:</b>	Outside mounted roller shades will be made to exact ordered measurements. Inside mounted roller shades will have 1/8" deducted at the factory from finished width. See Product Limits.

### Product Limits

Controls (Manual)	Min. Width	Max. Width	Min. Drop	Max. Drop
Clutch Left	18"	156"	18"	240"
Clutch Right	18"	156"	18"	240"
Spring Assist	36"	156"	18"	240"

**⚠ WARNING ⚠ ADVERTENCIA**



Cords on window covering products present a potential strangulation hazard.



Las cuerdas y cadenas y persianas presentan un peligro de estrangulación.



For child safety, consider cordless alternatives or products with inaccessible cords.




Para la seguridad de los niños, considere alternativas sin cuerdas o productos con cuerdas y cadenas inaccesibles.

SAFLAB-3 04/2013

ANSI/WCMA 5.1.4

SAFLAB-3 04/2013

ANSI/WCMA 5.1.4

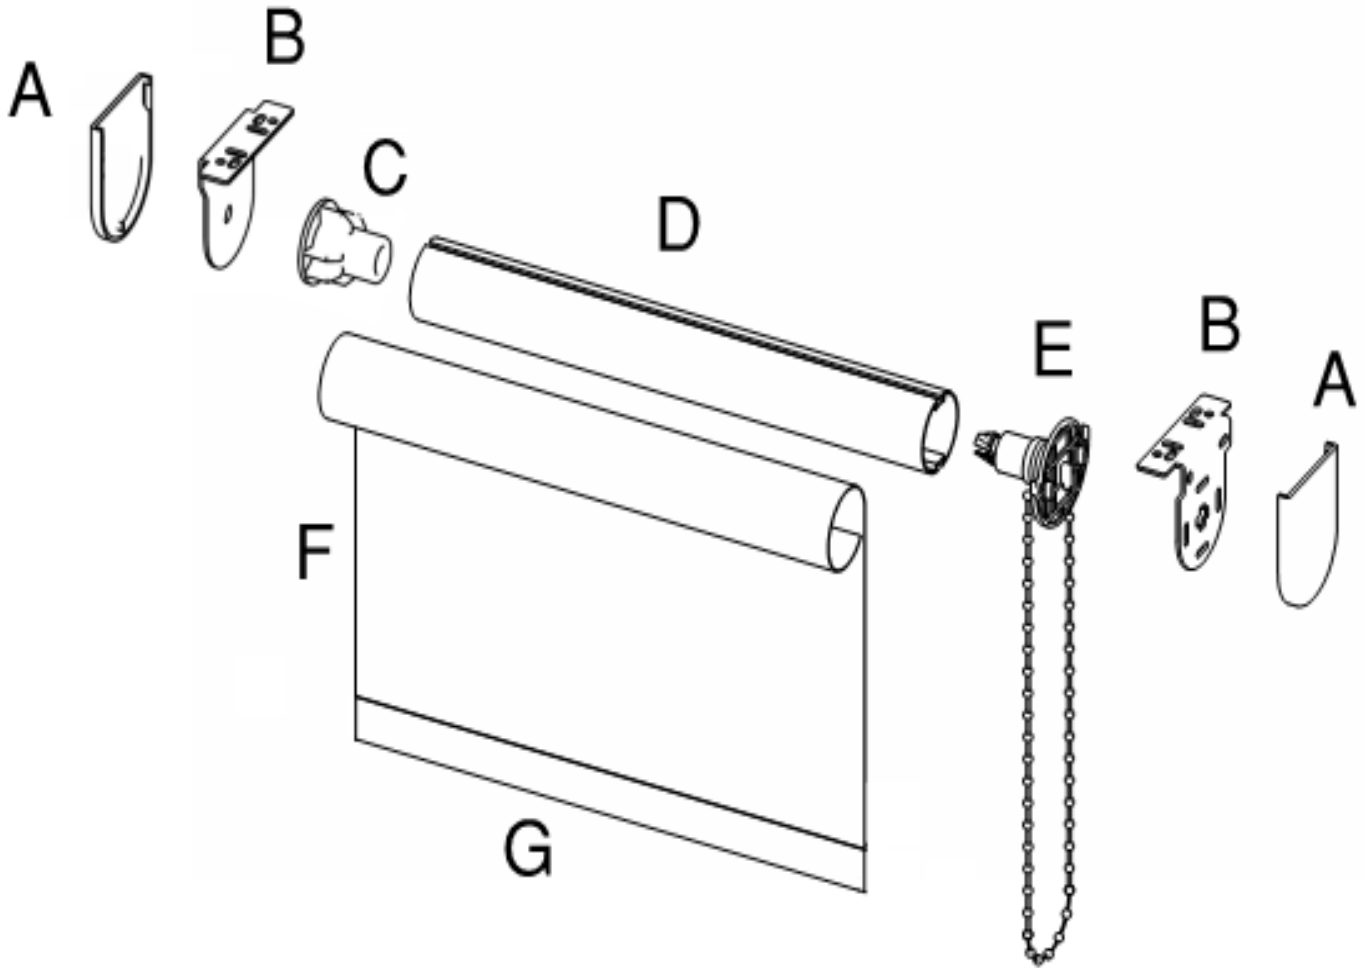

- A: Bracket Cover
- B: Bracket
- C: Idle End
- D: Tube
- E: Clutch
- F: Fabric
- G: Enclosed Hembar